

CAMSO SKS 753



SKID STEER
LOADERS



VERSATILITY AND DURABILITY

SKS 753 is the newest innovation in versatility and durability. A next generation tire solution for mixed-surface operations. With enhanced tread life, excellent traction and puncture resistance, it's the perfect choice for a wide variety of severe applications.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 753



INNOVATIVE NON-DIRECTIONAL TREAD PATTERN

- Optimizes durability and versatility on mixed and hard surfaces

HIGH LUG-TO-VOID RATIO

- Provides excellent wear and puncture resistance

NEW IMPACT GUARD SIDEWALL DESIGN


- Deflects debris to better protect sidewalls and reduce stress cracking

STEPPED SHOULDER LUGS

- Enhance tread cleanout and traction in softer surfaces

TIRE SIZE	PR	RIM SIZE	ACTUAL TIRE DIMENSIONS					INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
			O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32 nd]	SLR [mm] [in]	RC [mm] [in]		Static	10 km/h 5 mph	15 km/h 10 mph	30 km/h 20 mph
10-16.5 NHS	10	8.25	791	268	29	367	2386	5.20	3375	2135	1685	1450
			31.1	10.6	37	14.4	93.9	75	7440	4710	3720	3205
12-16.5 NHS	12	9.75	837	326	29	388	2496	5.50	4525	2865	2265	1950
			33.0	12.8	37	15.3	98.3	80	9985	6320	4995	4300
14-17.5 NHS	14	10.50	950	357	40	436	2861	5.50	6125	3875	3060	2635
			37.4	14.1	50	17.2	112.6	80	13495	8540	6745	5805

PERFORMANCE COMPARISON

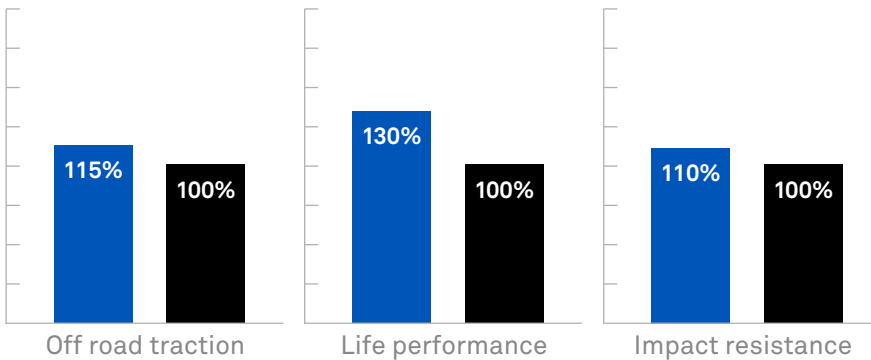

■ CAMSO SKS 753

■ Hauler SKZ

Camsco SKS 753 has stepped shoulder lugs for better versatility in off road conditions and 30% better life performance compared to Hauler SKZ in controlled conditions. With high lug-to-void ratio, SKS 753 demonstrated minimum 10% better impact resistance compared to the legacy tire.

AUTHORIZED DISTRIBUTOR:

camsco.co



FORMERLY CAMOPLAST SOLIDEAL